




General Mechanical Axis Inc.

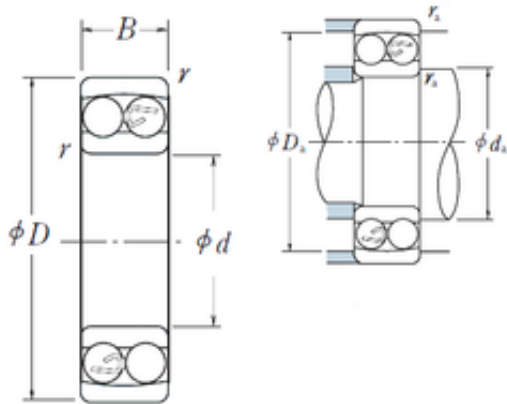

50 mm x 110 mm x 40 mm NSK 2310 Rodamientos De Bolas Autoalineables

Bearing No. 2310

2310 Bearing 2D drawings and 3D CAD models

Size	50x110x40 mm
Bore Diameter	50 mm
Outer Diameter	110 mm
Width	40 mm
d	50 mm
D	110 mm
B	40 mm
C	40 mm
r min.	2 mm
da min.	59 mm
Da max.	101 mm
ra max.	2 mm
Weight	1,58 Kg
Basic dynamic load rating (C)	65 kN
Basic static load rating (C0)	20,2 kN
(Grease) Lubrication Speed	5 000 r/min
(Oil) Lubrication Speed	6 300 r/min
Calculation factor (e)	0,42
Calculation factor (Y0)	1,6
Calculation factor (Y2)	2,3
SRI	9.17
Y3	1.5
hidYobi	2310
LangID	1
PCD	78.7



General Mechanical Axis Inc.

D_	110
Y2	2.3
SREX	0
cyl count	12
B_	40
hidTable	ecat_NSSAB
Oil rpm	6300
SRE	0
Y0	1.6
mass	1.58
ra	2
GRS rpm	5000
SRIX	0.065
groove inner	61.203
D_a	101
SRIN	0
C0	20.2
groove outer	99.233
SREN	0
X0	1
Prod_Type3	SABB_SA_CB
X1	1
da	59
X2	0.65
e	0.42
yobi	2310
r	2
KBRG	1354
CAng	15.753
cyl dia	17.462