




General Mechanical Axis Inc.

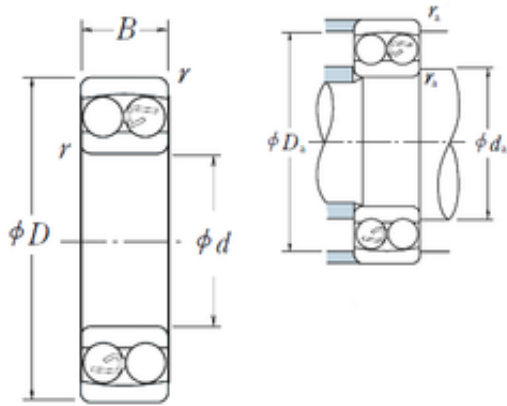

2306 Bearing 2D drawings and 3D CAD models

30 mm x 72 mm x 27 mm NSK 2306 Rodamientos De Bolas Autoalineables

Bearing No. 2306

Size	30x72x27 mm
Bore Diameter	30 mm
Outer Diameter	72 mm
Width	27 mm
d	30 mm
D	72 mm
B	27 mm
C	27 mm
r min.	1,1 mm
da min.	36,5 mm
Da max.	65,5 mm
ra max.	1 mm
Weight	0,48 Kg
Basic dynamic load rating (C)	32 kN
Basic static load rating (C0)	8,75 kN
(Grease) Lubrication Speed	8 000 r/min
(Oil) Lubrication Speed	10 000 r/min
Calculation factor (e)	0,44
Calculation factor (Y0)	1,5
Calculation factor (Y2)	2,2
SRI	6.25
Y3	1.4
hidYobi	2306
LangID	1
PCD	50.2



General Mechanical Axis Inc.

D_	72
Y2	2.2
SREX	0
cyl count	11
B_	27
hidTable	ecat_NSSAB
Oil rpm	10000
SRE	0
Y0	1.5
mass	0.48
ra	1
GRS rpm	8000
SRIX	0.05
groove inner	38.268
D_a	65.5
SRIN	0
C0	8.75
groove outer	64.214
SREN	0
X0	1
Prod_Type3	SABB_SA_CB
X1	1
da	36.5
X2	0.65
e	0.44
yobi	2306
r	1.1
KBRG	1354
CAng	16.322
cyl dia	11.906